


# MINI-PRO ULV

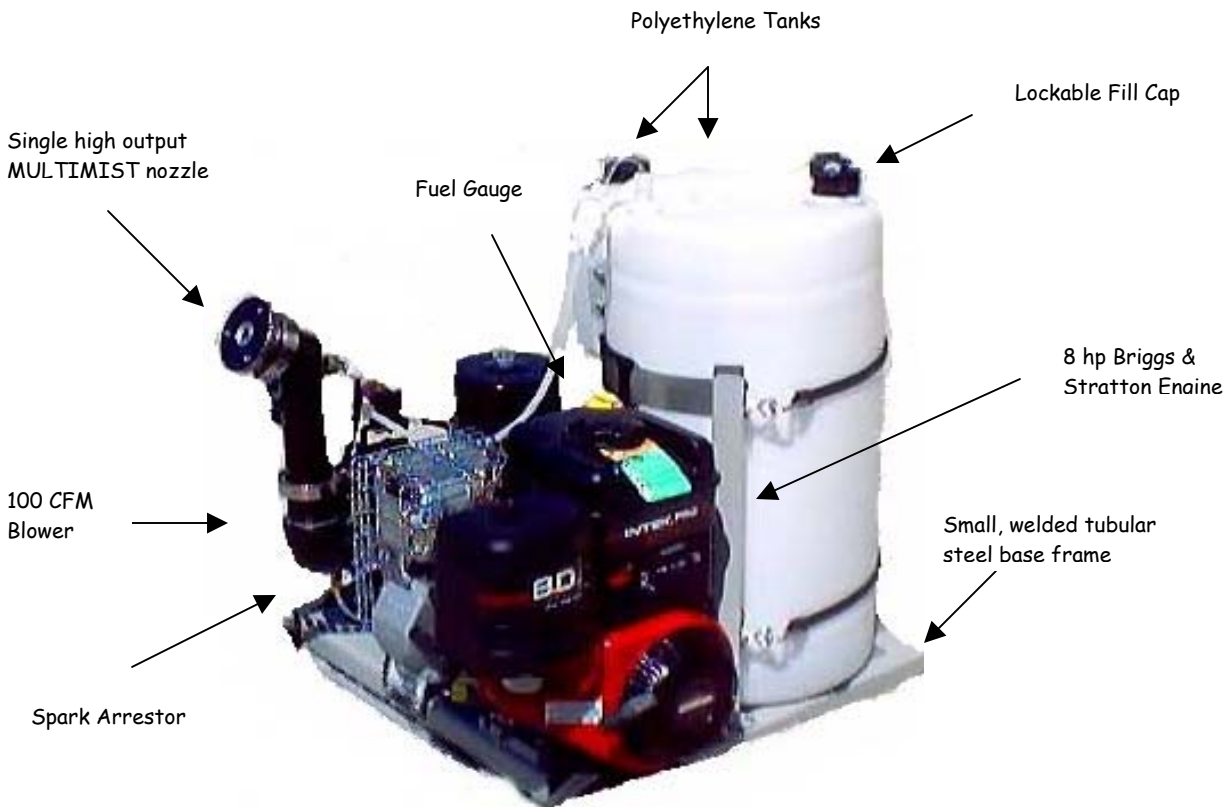

The **MINI-PRO** dispenses insecticides, fungicides, germicides, disinfectants, odor control and other chemical products. Engineered and developed with the professional in mind, the MINI-PRO is ideal for cattle barns, food processing plants, warehouses, barracks, shopping ventures, schools, restaurants, apartment buildings, grain mills, factories and more.

The **MINI-PRO** is simple to operate, easy to set up, transport and store. This lightweight powerhouse that was engineered for heavyweight jobs offers many features at a surprisingly low cost.

The DYNA-FOG MULTIMIST nozzle will produce 90% of the droplets below 20 microns when used at the recommended flow rates and pressures. This meets the requirement of all current chemical labels.

Backed by DYNA-FOG'S 1-year warranty and a worldwide network of factory trained, experienced distributors.

DISTRIBUTED BY:

**MUG-A-BUG**

**Rt. 51 North, P.O. Box 117**

**Forsyth, IL 62535**

**(217) 875-3303**

## STANDARD FEATURES

- ▶ 8 hp Briggs & Stratton engine with air cooled single cylinder valve, electric start, charging system and spark arrestor fitted to the exhaust
- ▶ Digital tachometer/hour meter
- ▶ Direct drive, positive displacement blower with corrosion resistant air filter/silencer
- ▶ Electric stainless steel solenoid valve
- ▶ Liquid filled pressure gauge to monitor nozzle air pressure
- ▶ Shock-absorbing vibration pads that cut vibration to a minimum
- ▶ Small base frame to permit mounting in almost any truck
- ▶ Single nozzle to produce a precise droplet size for optimal results
- ▶ Welded tubular steel frame
- ▶ 1-year warranty
- ▶ Chemical resistant epoxy paint

### OPTIONAL EXTRAS

- ▶ Heavy duty 12V battery
- ▶ Adjustable boom for vertical movement of nozzle
- ▶ FMI Pumping System

## SPECIFICATIONS

<b>ENGINE:</b>	4-cycle, single cylinder, OHV 8 hp gasoline engine, alternator and electric start.
<b>BLOWER:</b>	Rotary positive displacement direct drive. Air output 100 CFM (2.8m/min)
<b>PUMP:</b>	Diaphragm 0-123 oz (0-3.8 l/min).
<b>NOZZLE:</b>	Single high output MULTIMIST nozzle Adjustable 360° horizontally.
<b>TANKS:</b>	Corrosion and UV Resistance high density polyethylene with level graduations.
<b>CAPACITIES:</b>	Formulation: 15 gal with lockable cap. Flush: 1 gal
<b>REMOTE CONTROL:</b>	Spray On/Off, Flush On/Off, Machine Start
<b>DIMENSIONS:</b>	Length x Width x Height 32in x 28in x 33in (uncrated) 68in x 39.5in x 39in (crated)
<b>MACHINE WEIGHT:</b>	210 LBS
<b>SHIPPING WEIGHT:</b>	220 LBS